

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

EP 1 213 667 A2

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
12.06.2002 Bulletin 2002/24

(51) Int Cl.7: G06F 17/30

(21) Application number: 01310210.8

(22) Date of filing: 06.12.2001

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventors:  
• McGrath, Mark John  
Bracknell, Berkshire RG12 3HM (GB)  
• David, Morgan William Amos  
Farnham, Surrey GU9 9PP (GB)

(30) Priority: 07.12.2000 GB 0029893

(71) Applicant: Sony United Kingdom Limited  
Weybridge, Surrey KT13 0XW (GB)

(74) Representative: Turner, James Arthur et al  
D. Young & Co.,  
21 New Fetter Lane  
London EC4A 1DA (GB)

### (54) Video information retrieval

(57) A video information retrieval system comprises a client system having: means for issuing a search request in respect of desired video material; and means for accessing video material on the basis of a uniform resource locator (URL) and a SMPTE unique material identifier (UMID); a server system having: access to one or more databases containing metadata information relating to a plurality of video material items, a UMID associated with each video material item and at least one URL associated with each UMID; means for receiving a search request from the client system and detecting one

or more video material items for which metadata information stored in at least one of the database(s) substantially corresponds to the search request; means for supplying the metadata information, the URL and the UMID relating to the one or more detected video material items to the client system; and at least one video repository having: a video storage arrangement storing video material and associated UMID data; in which the metadata, the URL and the UMID are communicated between the server and the client using a markup language having descriptors for data content.

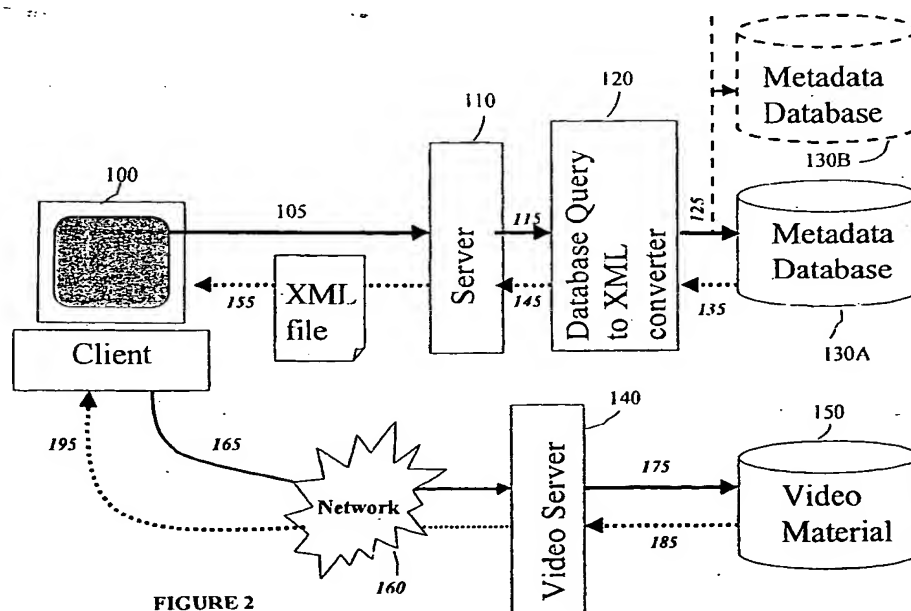


FIGURE 2

## Description

[0001] This invention relates to video information retrieval.

[0002] Video images are a useful resource for entertainment and for dissemination of information. Digital video images are also increasingly being used in a wide range of multimedia applications.

[0003] The sheer volume of video information currently available to the user is overwhelming with the existence of many video libraries and archives each of which potentially stores millions of images. These video archives have a broad spectrum of users running different applications and requiring a range of services from provision of subject-specific video clips for editing purposes to video on demand. In practical terms the video archive environment must allow users to run custom applications which utilise a common database of video images and provide descriptive data related to the video images to allow the user to make an informed choice of which media file to download. The generic term for the descriptive data associated with video images is metadata.

[0004] Computer database management systems have proved to be very effective for organising text and numeric data. The most widespread database management systems are known as "relational" databases. These systems collect data and organise it as a set of formally described tables from which data can be accessed selectively and reassembled in a variety of ways without having to reorganise the data tables. The standard user and application program interface (API) to a relational database is the structured query language (SQL) which can be used for simple interactive queries as well as for more extensive data gathering for use in compiling reports.

[0005] A further example of an information management system is a web search engine. The web search engine is ideally suited for use in a multimedia environment and has three basic components:

- A program known as a "spider" that goes to every page or representative pages on every web site that wants to be searchable and reads it, using hypertext links on each page to discover and read a site's other pages.
- A program that creates a master index from the pages that have been read.
- A program that receives a user's **text-based** search request, compares it to the entries in the master index, and returns results to the user.

[0006] Video archives are of very limited value to the user unless there is an information management system for images capable of delivering images based on their specific content. This video information management system is likely to require features used in database management systems as well as some of the functionality of the web search engine. One difficulty is that im-

age and video data require a much higher bandwidth than text-based information. Downloading a video clip across a computer network can be very time consuming because of the large quantity of data involved. In some cases the user may have to download and view several video clips in real time in order to find a clip with the required information content. Thus it is very important to provide the user with adequate information about images in the archives prior to any download to increase the likelihood of the downloaded images meeting the user-specific requirements. Some users may be looking for video clips that can be used to illustrate a particular feature or issue, for example, video segments showing a particular politician or dignitary. Other users might be searching for complete programmes and news items related to a specific topic such as global warming. It would also be advantageous to the user to have unrestricted access to as many video archives as possible via a single video-specific search query.

[0007] A typical prior-art video information retrieval system for use on the world-wide web is illustrated in Figure 1. Video source material 10 is input as raw video information 15 to an encoding and content-analysis module 20. The source material could be a digital or analogue video-cassette, an electronically stored digital video file or a broadcast signal fed directly via satellite. The encoding and content-analysis module 20 takes the video source material and produces digital copies in various alternative formats ranging from low bit-rate versions suitable for use on Internet browser plug-ins such as RealVideo™ to high bit-rate broadcast quality MPEG2 images.

[0008] On input to the video archive system the analogue or digital source material is subject to an automated content-analysis process. This typically involves the use of local intensity histograms, edge histograms, geometrical shape analysis, face detection and on-screen text extraction to establish and log the content of each image. The associated audio samples may be processed for content using speech detection algorithms. Proprietary content-analysis software such as Virage's Videologger™ has been used for this purpose. The result is a video index 25 which summarises the content of the video material.

[0009] A video application server 30 stores the video index 25 in an appropriate format so that it is accessible to a web server 40. In addition the video application server 30 provides a flexible template system, handles client-queries and provides administration tools. Clients 50 running Internet browsers have access to the video index via the web server 40. The clients may enter search terms in a standard web search engine which is interfaced the video index so that video material can be selectively retrieved on the basis of its logged content.

[0010] The encoding and content-analysis module 20 outputs the digital video information 65 across a distribution network. The digital video information 65 is available for download to the clients via a video server 50.

The video index 25 is used to search for and retrieve particular video clips required by users.

**[0011]** The invention provides a video information retrieval system comprising:

a client system having:

means for issuing a search request in respect of desired video material; and

means for accessing video material on the basis of a uniform resource locator (URL) and a SMPTE unique material identifier (UMID);

a server system having:

access to one or more databases containing metadata information relating to a plurality of video material items, a UMID associated with each video material item and at least one URL associated with each UMID;

means for receiving a search request from the client system and detecting one or more video material items for which metadata information stored in at least one of the database(s) substantially corresponds to the search request; means for supplying the metadata information, the URL and the UMID relating to the one or more detected video material items to the client system;

and at least one video repository having:

a video storage arrangement storing video material and associated UMID data;

in which the metadata, the URL and the UMID are communicated between the server and the client using a markup language having descriptors for data content.

**[0012]** The invention provides an improved video information retrieval system which (a) uses UMIDs to access video material, thereby providing a unique and platform- (or vendor-) independent index to the video material, and (b) uses a markup language having descriptors for data content as the transmission means for the search results, which means again that the communication required for the video information retrieval system can potentially be platform- and vendor-independent as such markup language files are potentially transmissible via the generally available http port 80.

**[0013]** Further respective aspects and features of the invention are defined in the appended claims.

**[0014]** Embodiments of the invention will now be described with reference to the accompanying drawings, throughout which like parts are referred to by like references, and in which:

Figure 1 schematically illustrates a prior art video information retrieval system;

Figure 2 is a schematic diagram of a video information retrieval system according to an embodiment of the present invention; and

Figures 3 and 4 are schematic examples of the use of XML data structures.

**[0015]** Referring now to the drawings, Figure 2 is a schematic illustration of a video information retrieval system according to an embodiment of the invention. A client 100 running a web browser initiates a search request 105 specifically directed to video material. The search is performed via a web search engine. The search engine communicates via a common gateway interface (CGI) on a server 110. The search engine converts the client request to a database query 115 and the client request is output as a signal 125 to a metadata database 130A or, if so required, to a series of databases (130A, 130B...) distributed across the Internet.

**[0016]** The main obstacle in attempting to gain access to remote databases of video material via the Internet is that in many cases client and server machines will be separated by a *firewall* or proxy server. A firewall is a set of related programs, located at a network gateway server, that protects the resources of a private network from users of other networks. By working closely with a router program, a firewall filters all network packets and decides whether or not to forward them to their destination. A proxy server which makes network requests on behalf of users may be included in a firewall or work closely with it. Firewalls are generally able to distinguish one protocol from another. In the Transmission Control Protocol/ Internet Protocol (TCP/IP) architecture a specific port number is assigned to each common protocol and each request made using that protocol carries that number. For example HTTP is assigned to *port 80* while File Transfer Protocol (FTP) is assigned to *port 21*. Most firewalls allow blocking of a specific protocol by rejecting all traffic sent on the port number associated with that protocol. Most firewalls are configured to let through traffic on port 80 which is how HTTP requests from browsers get through. Since each unblocked protocol poses a potential security threat, firewalls are generally set up to block most ports with the exception of port 80. As shall be explained below, the interchange between the client and the metadata database according to embodiments of the invention, is in a markup language that has descriptors for data content such as XML. Since XML is text-based, advantage can be taken of HTTP port 80 to deploy an Internet-wide video archive search facility. HTTP alone would not be sufficient to implement searches on remote databases of video material across multiple platforms because it lacks a single standard format for representing queries. Because XML is a platform-neutral data representation, it can be used on top of HTTP to serialise data into a transmissible form that is easily decoded on any platform. This is the basis on which remote procedure call (RPC) protocols such as Microsoft's Simple Object Access Protocol (SOAP™)

operates. RPCs are specially designed to provide access to computer program objects resident on machines that are distributed across the Internet.

[0017] In a video retrieval system designed for deployment across the Internet there will be no central management of the video archives, and therefore it is very important to be able to uniquely and unambiguously identify each video clip that is accessible to the user. The metadata database 130 uses the SMPTE UMID to relate the stored metadata to the particular video material from which it was generated.

[0018] The UMID is described in the March 2000 issue of the "SMPTE Journal". An "extended UMID" comprises a first set of 32 bytes of "basic UMID" and a second set of 32 bytes of "signature metadata". The basic UMID has a key-length-value (KLV) structure and it comprises:

- A 12-byte Universal Label or key which identifies the SMPTE UMID itself, the type of material to which the UMID refers. It also defines the methods by which the globally unique Material and locally unique Instance numbers (defined below) are created.
- A 1-byte length value which specifies the length of the remaining part of the UMID.
- A 3-byte Instance number used to distinguish between different "instances" or copies of material with the same Material number.
- A 16-byte Material number used to identify each clip. A Material number is provided at least for each shot and potentially for each image frame.

The signature metadata comprises:

- An 8-byte time-date code identifying the time of creation of the "Content Unit" to which the UMID applies. The first 4-bytes are a Universal Time Code (UTC) based component.
- A 12-byte value which defines the (GPS derived) spatial co-ordinates at the time of Content Unit creation.
- 3 groups of 4-byte codes which comprise a country code, an organisation code and a user code.

[0019] The metadata databases 130 contain data describing the content of video material. The metadata includes location information for the video images to which it corresponds, such as a uniform resource locator (URL). The URL for a video clip is associated with the UMID identifier and an additional timecode can be used to obtain particular still images from a given clip. The metadata also includes analysis data from post-processing of the image signal such as sub-shot segmentation information and information about an image frame called a representative keystamp (RKS) which gives a visual indication of the predominant overall contents of each shot or sub-shot.

[0020] Proprietary content-extraction tools such as Virage's Videologger™ can be used to obtain descriptive information about the component "objects" in each video clip such as people, buildings, cities, the topic or event to which the clip relates, actors names and details of the ownership rights of the footage. The content-index for each video clip is stored as metadata. The metadata can be stored in the databases 130 in any format.

[0021] As illustrated in Figure 2, the server 110 responds to the client search request 105 by returning an XML file 155 containing metadata for the video clips which match the user's search request. XML is an example of a markup language. Although XML is the preferred markup language for interchange of data between the client and the databases 130, any markup language that has descriptors for data content could be used. Markup languages are computer programming languages in which document structures are indicated in the same stream as the text. Markers like < and > divide documents into elements and attributes. Elements are containers hold that hold content and possibly other elements inside them in a hierarchy. Attributes provide additional information about a particular element. Elements and attributes are specified by tags enclosed in < and >. A start tag includes the element name and the names and values of the attributes while an end tag is marked by a forward-slash character and includes only the name of the element corresponding to the start tag that it matches. The syntax is as follows:

Start tag: **<elementName attributeName = "attribute-Value">**

*text included here in body of element*

End tag : **</elementName>**

[0022] Hypertext markup language (HTML) is the language of the world-wide web and its tags comprise a pre-defined and non-extensible set that describe document format i.e. how the contents of a document should be displayed. XML has tags which define an information structure by describing document content rather than document format. It allows developers to extend the set of tags used and to create their own vocabulary for describing information. A "schema" is a set of rules that describes a given class of XML documents. The schema defines the elements that can appear and their corresponding attributes. It also defines the hierarchical structure by specifying which elements are child elements of others, the order in which child elements appear and the number of child elements. XML is a simplified subset of its parent markup language, Standard Generalised Markup Language (SGML). XML is designed to allow the exchange information between a host of different applications running on different types of computers without repeated conversion to proprietary file formats. Although XML is the preferred language, any extensible markup language with the facility for data description tags could be used as a file format for data storage in the metastore.

[0023] An example portion of an XML file that might

be used in embodiments of the invention is shown in Figure 4. The <media> tag occurs at the top level of the hierarchy and contains at the next level down, the "metadata objects" element and the "metadata tracks" element. The child elements of the metadata objects are shown as elements for person, place and topic, each of which has an "href" attribute. This attribute provides a link to an image associated with the respective metadata object. The body of each element contains the information itself, for example there are person elements in Figure 4 that mark the names of Bill Clinton and Nelson Mandela. The metadata object elements mark text-based descriptions of objects that appear in the images while the metadata tracks provide an index to the subset of images of a clip in which the particular metadata object associated with the metadata track features. The UMID is included as a child element of the metadata tracks. The advantage of explicitly providing an index to the subset of images in which an object appears is that rather than downloading an entire video clip with which the object is associated, only the subset of images and the associated audio in which the metadata object appears need be downloaded from the video store. This reduces download time and saves bandwidth. The full clip can also be downloaded if so required.

[0024] Figure 5 shows the hierarchical structure of the XML metadata file of Figure 3. The media tag 200 is at the top level of the hierarchy. The metadata objects 220 and the metadata tracks 210 are both child elements of the media element 200. Each metadata object has a corresponding metadata track partner. This is illustrated by the person element 230A which corresponds to the person track 230B. The UMID elements 240 are at the lowest level of the hierarchy in this case.

[0025] The fact that the interchange between the client and the database is in XML provides advantages over the prior-art systems. In particular, the XML interface between client and database allows complex queries to be constructed using XML query language. The software interfaces between the client and the metadata are independent of the particular data schema used by the customer which means that the customer has the freedom to design and use his own specific business schema in conjunction with the video material database according to the invention. The video information retrieval system of the present invention also allows for easy integration of proprietary video content-extraction tools and database systems from other vendors.

[0026] The XML file 155 will include URLs for low bandwidth and full bandwidth versions of the video clips. The user may require full bandwidth video material for use with high-end equipment or to include in a television broadcast. Low bandwidth video material may be required by the user for viewing on low-end equipment for editing purposes or for transmission across computer networks. The XML file will also provide links to still images such as the representative keystamp (RKS) images for each of the video clips highlighted by the search

query. The RKS images are located by a CGI script hosted by a web server which takes the UMID and the time-code as parameters.

[0027] The XML file is converted to HTML and displayed in the client's browser. The user at the client computer makes a decision as to which video material to download on the basis of the metadata provided. To download the video material the user initiates a client request 165 which is directed to the appropriate video server using the URL and UMID information contained in the XML file 155.

[0028] Although the metadata can be stored in the databases 130 in any format, because the exchange of data between the databases 130 and the client 100 is in XML, it may also be convenient to store metadata in hierarchical formats in the databases 130 using XML. The databases 130 could use an object database to store the XML metadata files. The hierarchical structure of XML means that it is more efficient to store complex XML files in an object database rather than a relational database. The XML is parsed into object structures prior to being stored in the object database. The use of the object database has the advantage that the information is stored in a format which makes it easy to access elements and attributes rapidly without the requirement of loading and parsing of a sequential file.

## Claims

### 1. A video information retrieval system comprising:

a client system having:

means for issuing a search request in respect of desired video material; and  
means for accessing video material on the basis of a uniform resource locator (URL) and a SMPTE unique material identifier (UMID);

a server system having:

access to one or more databases containing metadata information relating to a plurality of video material items, a UMID associated with each video material item and at least one URL associated with each UMID;

means for receiving a search request from the client system and detecting one or more video material items for which metadata information stored in at least one of the database(s) substantially corresponds to the search request;

means for supplying the metadata information, the URL and the UMID relating to the one or more detected video material items

to the client system;

and at least one video repository having:

a video storage arrangement storing video material and associated UMID data; 5

in which the metadata, the URL and the UMID are communicated between the server and the client using a markup language having descriptors for data content. 10

2. A system according to claim 1, in which the search requests are communicated between the server and the client using a markup language having descriptors for data content. 15

3. A system according to claim 1 or claim 2, in which the database stores metadata in a hierarchical representation using a markup language having descriptors for data content. 20

4. A system according to any one of claims 1 to 3, in which the markup language is an extensible markup language (XML). 25

5. A system according to any one of the preceding claims, in which the client and the server communicate via http port 80. 30

6. A system according to any one of the preceding claims, in which the server system is operable to supply URLs to the client system for accessing the video material in a broadcast-quality representation. 35

7. A system according to any one of the preceding claims, in which the server system is operable to supply URLs to the client system for accessing the video material in a sub-broadcast-quality representation. 40

8. A system according to any one of the preceding claims, in which the server system is operable to supply URLs and video timecodes to the client system for accessing single images representative of the content of the video material. 45

9. A system according to any one of the preceding claims, in which the server, the client and the video repository communicate via the world wide web. 50

10. A video information server having:  
access to one or more databases containing metadata information relating to a plurality of video material items, a SMPTE unique material identifier (UMID) associated with each video 55

material item and a uniform resource locator (URL) associated with each UMID;

means for receiving a search request from a client system and detecting one or more video material items for which metadata information stored in at least one of the database(s) substantially corresponds to the search request;

means for supplying the metadata information, the URL and the UMID relating to the one or more detected video material items to the client system using a markup language having descriptors for data content.

11. A video information retrieval client system comprising:

means for issuing a search request to a video information server system in respect of desired video material;

means for receiving search results from the server system comprising at least a uniform resource locator (URL) and a SMPTE unique material identifier (UMID); and

means for accessing video data from a video repository on the basis of the URL and the UMID data;

in which the metadata, the URL and the UMID are communicated between the server and the client using a markup language having descriptors for data content.

12. A method of video information retrieval using a server system having access to one or more databases containing metadata information relating to a plurality of video material items, a SMPTE unique material identifier (UMID) associated with each video material item and a URL associated with each UMID;

the method comprising the steps of:

a client system issuing a search request in respect of desired video material;

the server system receiving the search request from the client system and detecting one or more video material items for which metadata information stored in at least one of the database(s) substantially corresponds to the search request; and

the server system supplying the metadata information, the URL and the UMID relating to the one or more detected video material items to the client system using a markup language having descriptors for data content;

the client system accessing video material on the basis of the uniform resource locator (URL) from a video repository having a video storage arrangement storing video material and asso-

ciated UMID data.

13. A method of video information retrieval, the method  
being substantially as hereinbefore described with  
reference to Figures 2 to 4 of the accompanying  
drawings. 5
14. Computer software having program code for carry-  
ing out a method according to claim 12 or claim 13. 10
15. A data providing medium by which computer soft-  
ware according to claim 14 is provided.
16. A medium according to claim 15, the medium being  
a transmission medium. 15
17. A medium according to claim 15, the medium being  
a storage medium.

20

25

30

35

40

45

50

55

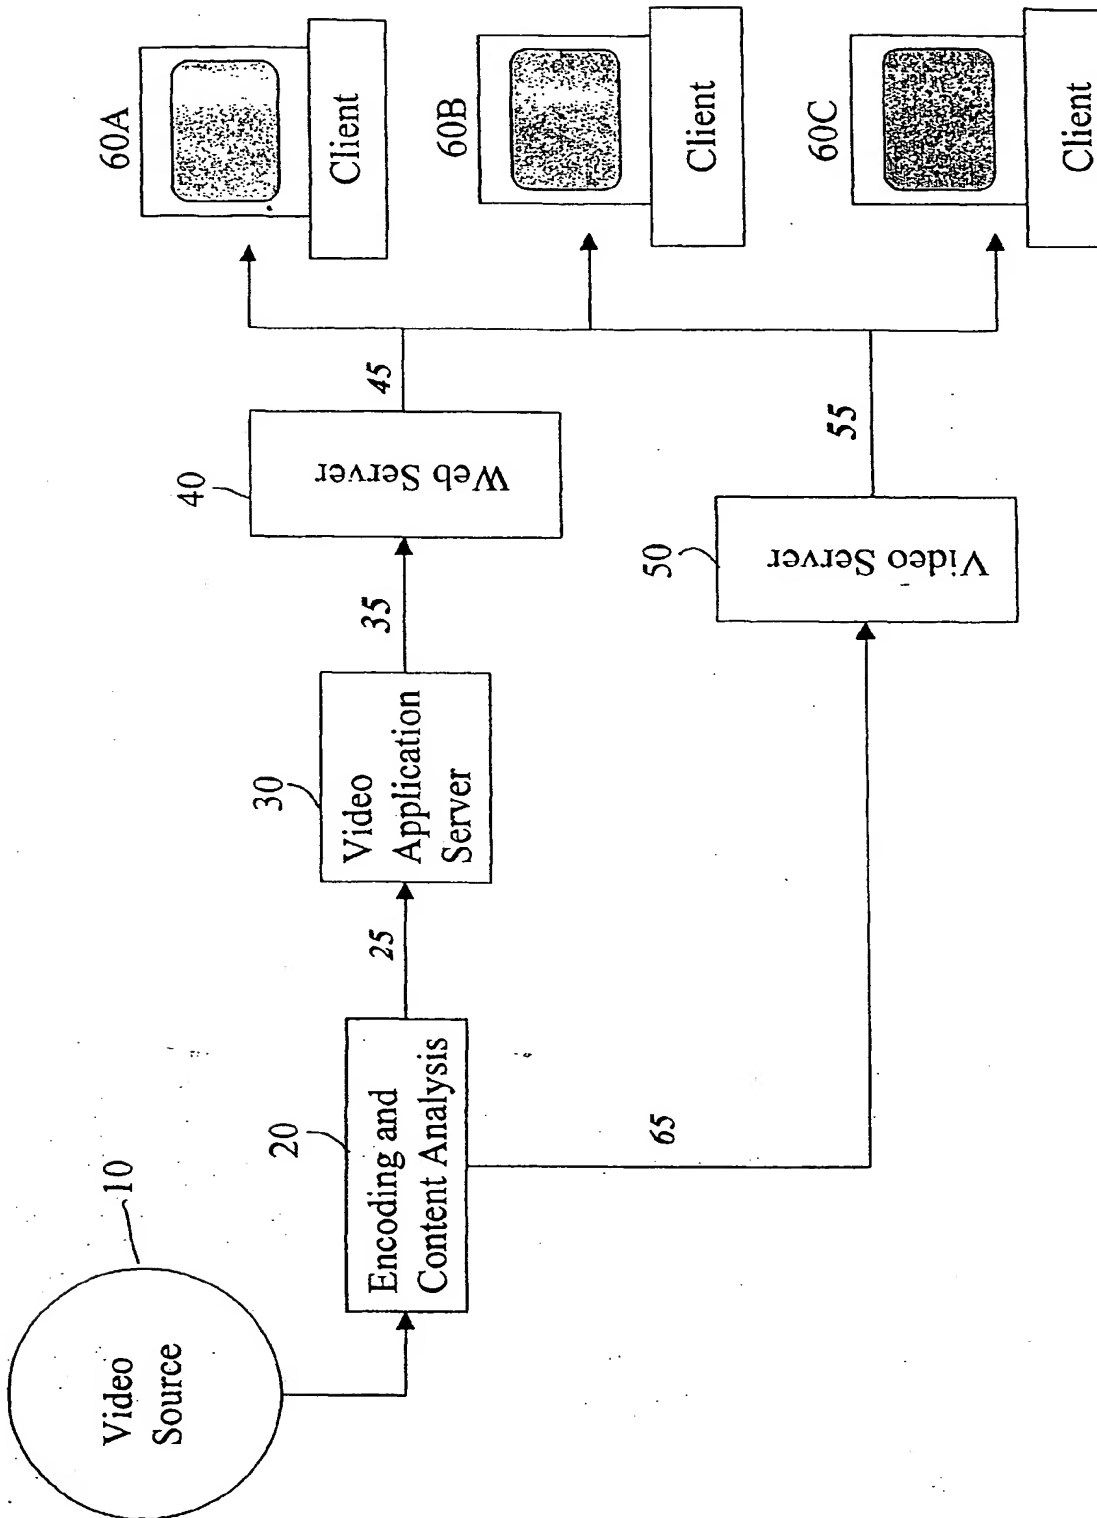


FIGURE 1

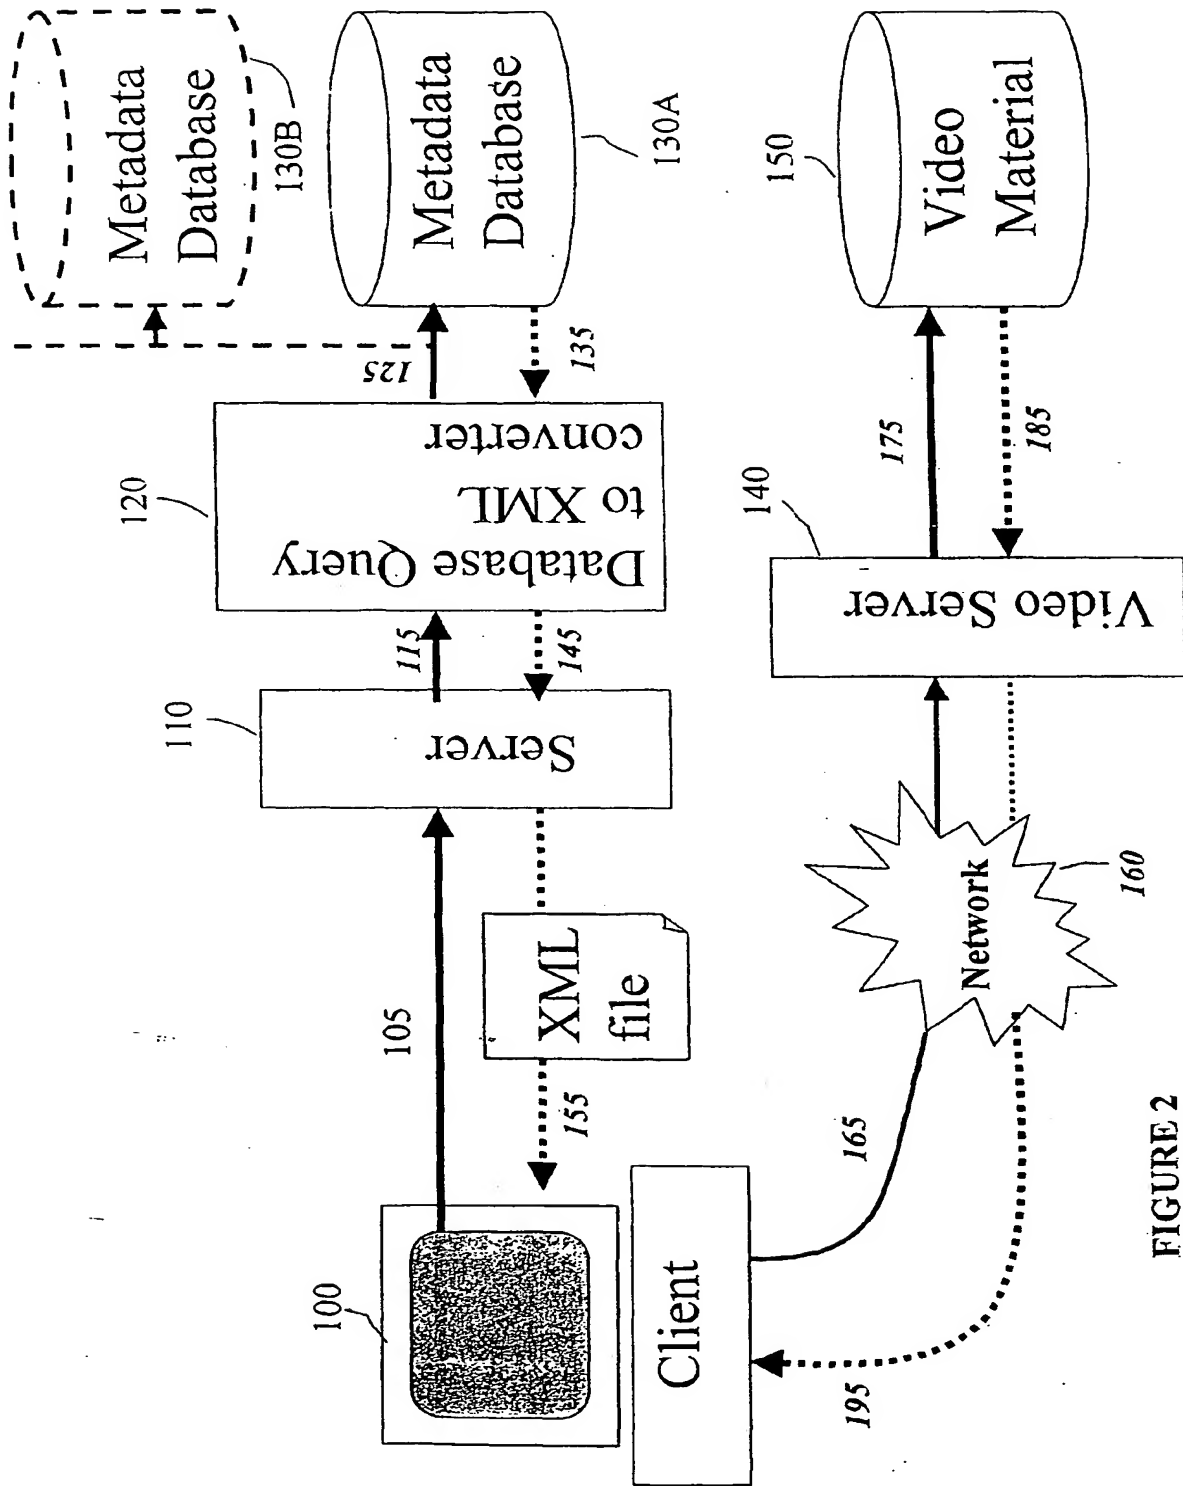


FIGURE 2

```
<media>
<metadata objects>
  <person href="..."> Bill Clinton </person>
  <person href="..."> Nelson Mandela </person>
  <place href="..."> London </place>
  <topic href="..."> global warming </topic>
</metadata objects>
<metadata tracks>
  <person track person="BillClinton">
    <track numbers> xxx </track numbers>
    <UMID> xxx </UMID>
  </person track>
</metadata tracks>
</media>
```

FIGURE 3

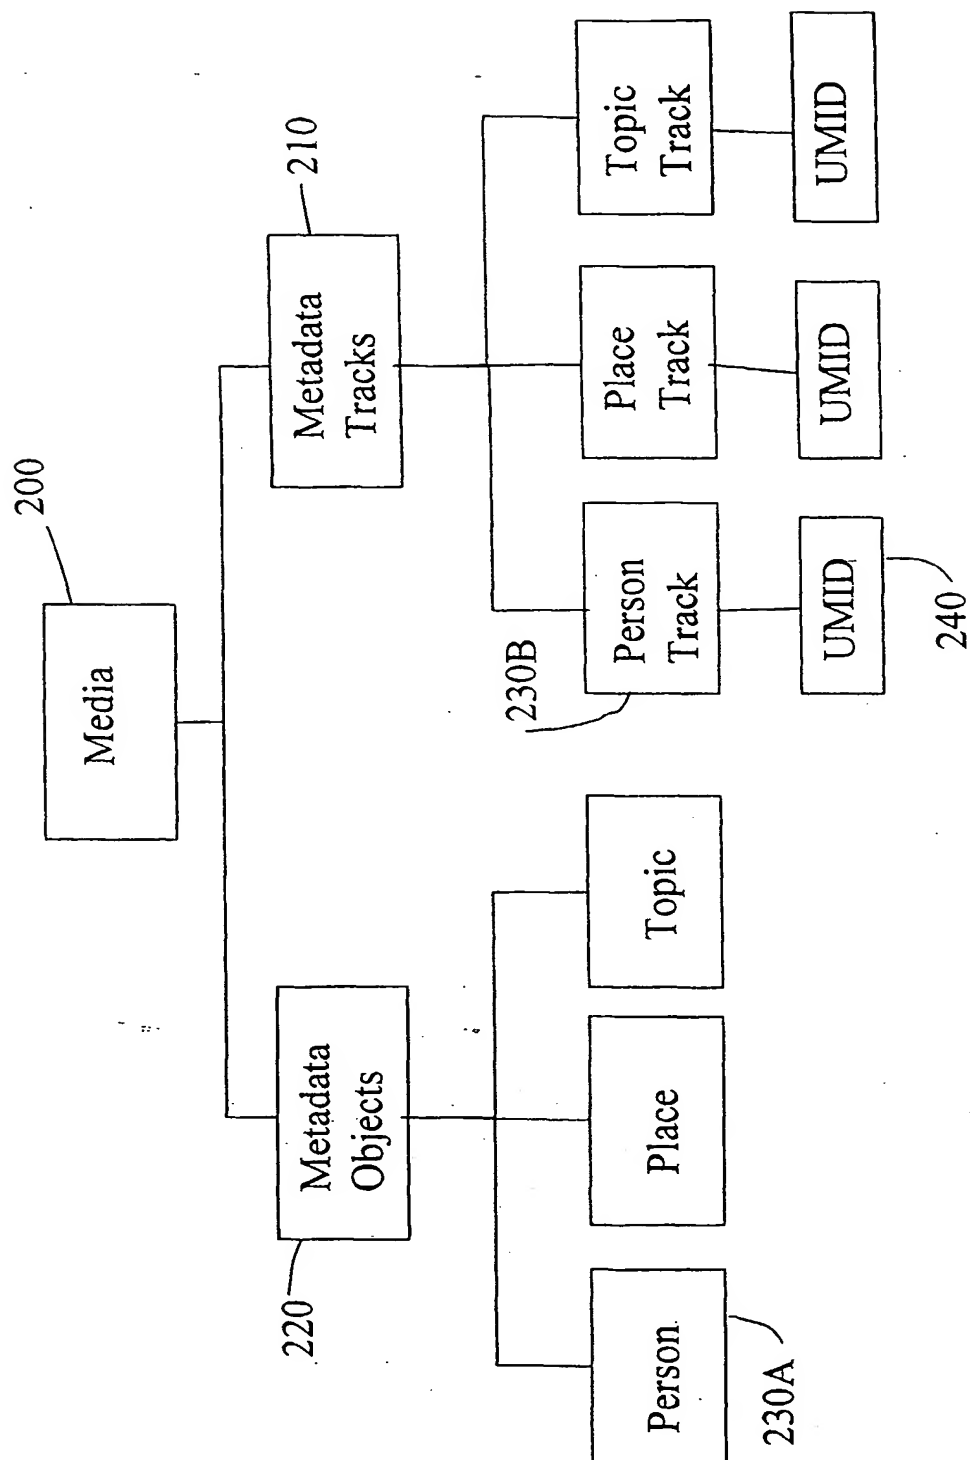


FIGURE 4



(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:  
14.12.2005 Bulletin 2005/50

(51) Int Cl.7: **G06F 17/30**

(43) Date of publication A2:  
12.06.2002 Bulletin 2002/24

(21) Application number: **01310210.8**

(22) Date of filing: **06.12.2001**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU**  
**MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventors:  
• **McGrath, Mark John**  
**Bracknell, Berkshire RG12 3HM (GB)**  
• **David, Morgan William Amos**  
**Farnham, Surrey GU9 9PP (GB)**

(30) Priority: **07.12.2000 GB 0029893**

(74) Representative: **Turner, James Arthur et al**  
**D Young & Co**  
**120 Holborn**  
**London EC1N 2DY (GB)**

(71) Applicant: **SONY UNITED KINGDOM LIMITED**  
**Weybridge, Surrey KT13 0XW (GB)**

(54) **Video information retrieval**

(57) A video information retrieval system comprises a client system having: means for issuing a search request in respect of desired video material; and means for accessing video material on the basis of a uniform resource locator (URL) and a SMPTE unique material identifier (UMID); a server system having: access to one or more databases containing metadata information relating to a plurality of video material items, a UMID associated with each video material item and at least one URL associated with each UMID; means for receiving a search request from the client system and detecting one

or more video material items for which metadata information stored in at least one of the database(s) substantially corresponds to the search request; means for supplying the metadata information, the URL and the UMID relating to the one or more detected video material items to the client system; and at least one video repository having: a video storage arrangement storing video material and associated UMID data; in which the metadata, the URL and the UMID are communicated between the server and the client using a markup language having descriptors for data content.

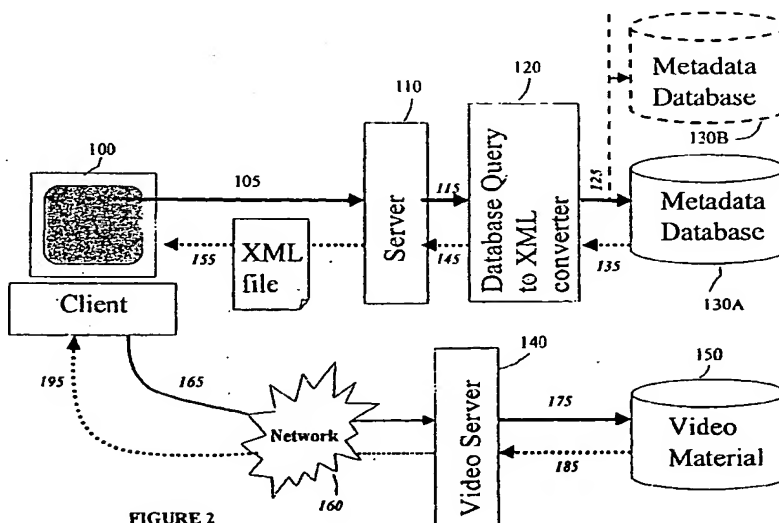


FIGURE 2



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 01 31 0210

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	DREWERY J.O. ET AL.: "The management and automatic production of Metadata" PROC. INTERNATIONAL BROADCASTING CONVENTION IBC 99, [Online] 10 September 1999 (1999-09-10), pages 90-95, XP002349562 Amsterdam, NL Retrieved from the Internet: URL: <a href="http://www.bbc.co.uk/rd/pubs/papers/pdf/files/ibc99jod.pdf">http://www.bbc.co.uk/rd/pubs/papers/pdf/files/ibc99jod.pdf</a> [retrieved on 2005-10-17] * page 92, left-hand column, line 36 - right-hand column, line 17 * * page 93, left-hand column, line 20 - right-hand column, line 10; figure 2 *	1-17	G06F17/30
A	MORGAN O.: "Wrappers and Metadata" EBU TECHNICAL REVIEW, [Online] 1998, pages 1-6, XP002349563 Retrieved from the Internet: URL: <a href="http://www.ebu.ch/departments/technical/trev/trev_277-morgan.pdf">http://www.ebu.ch/departments/technical/trev/trev_277-morgan.pdf</a> [retrieved on 2005-10-17] * page 3, line 7 - line 17; figure 2 * * page 5, line 5 - line 48; figures 5,6 *	1,10-15	TECHNICAL FIELDS SEARCHED (Int.Cl.7) G06F
A	HUNTER J ET AL: "A comparison of schemas for video metadata representation" COMPUTER NETWORKS, ELSEVIER SCIENCE PUBLISHERS B.V., AMSTERDAM, NL, vol. 31, no. 11-16, 17 May 1999 (1999-05-17), pages 1431-1451, XP004304565 ISSN: 1389-1286 * abstract *	2-4	
The present search report has been drawn up for all claims			
Place of search Berlin		Date of completion of the search 18 October 2005	Examiner Deane, E
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03.82 (P04C01)



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 01 31 0210

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	WO 00/33575 A (YUEN, HENRY, C) 8 June 2000 (2000-06-08) * page 7, line 30 - line 36; figure 4 * * page 8, line 10 - line 16 * -----	1,10-15	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search Berlin		Date of completion of the search 18 October 2005	Examiner Deane, E
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

1  
EPO FORM 1503 03.02 (P04001)

ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.

EP 01 31 0210

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

18-10-2005

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0033575	A	08-06-2000	AU 2034600 A	19-06-2000
			CA 2353533 A1	08-06-2000
			CN 1361986 A	31-07-2002
			EP 1142329 A1	10-10-2001
			JP 2003522346 T	22-07-2003
-----				

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**